



INSTALLATION INSTRUCTIONS

TIMBER PANELS

1a. At the bottom of each side frame, there is a metal anchor post bolted inside the frame. Undo both the bolts and retrieve the anchor post inside


1b. Turn the anchor post around and re-attach it so that it sticks out of the bottom of the steel frame



2. Dig two holes to match the spacing of the anchor posts.

3. Place the anchor posts into the holes (make sure they are attached to the timber frame – don't try to concrete the anchor posts by themselves). Preferably the anchor post goes into the concrete, not the letterbox frame.

4. Ensure the frame is square and pour concrete into the holes.

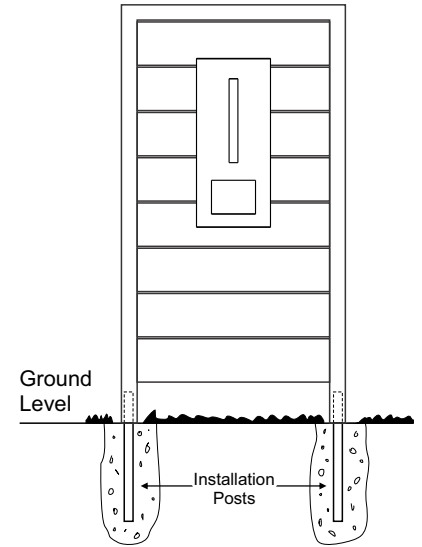

Maintaining the Timber Panel

The letterbox panel is made from Merbau. This is a tropical hardwood and is used in many outdoor applications because of its durability, stability, resistance to splitting and ability to cope with all environments.

Merbau timber naturally leeches its tannins when first exposed to rain or heavy dew. This can be flushed away by hosing the panel. Any stains that are on the metal letterbox surface should also wash away with water.

Over time the timber, if untreated, will weather to a silvery grey colour. This will occur with all hardwood timbers left in the sun. You can preserve the rich natural appearance of your panel by using a good quality decking oil or outdoor furniture oil. Simply rub the oil over the timber with a lint free cloth.