

## **Ground Mounting Frame**

56 Northgate Drive, Thomastown VIC 3043 www.milkcan.com.au support@milkcan.com.au (03) 9464 6964


Tools Contents CG01

**Required** Your carton should contain the following parts:
- Tape Measure 2 x Posts 1 x Cross Brace

- Spanner 2 x Cross Bars 1 x Accessories Bag

### **Optional**

- Spirit Level
- Hack Saw (if shortening width)

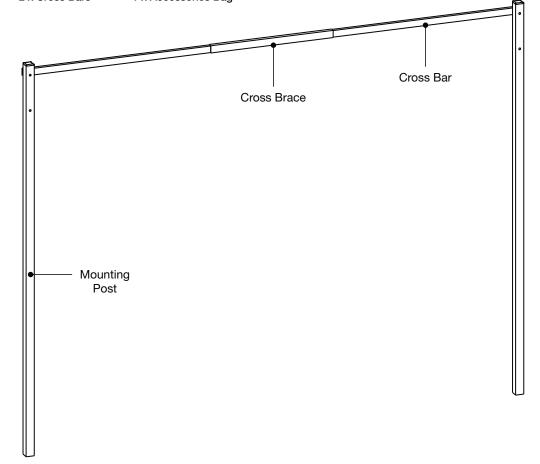

### **Choosing a Suitable Location**


The recommended mounting height of the top slotted hole in the wall bracket is: **USERS HEIGHT + 10cm.** Minimum height is 160cm.

The Clothesline and Ground Mount Kit are 240cm wide. If your required width is less than 240cm, please refer to Reducing the Overall Width below.

### **Reducing the Overall Width**

If your available space doesn't allow the full 240cm width, you can reduce the width of your Clothesline as follows:


- For this example, we are assuming your required overall width is 200cm. This is a total reduction of 40cm.
- Cut half from each side of the 2 x cross bar segments i.e. 40 / 2 = 20cm each side

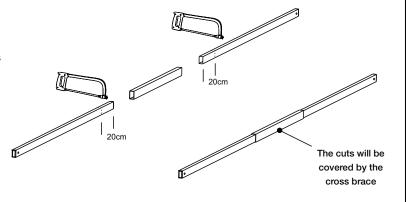



### **Assembly**

- Assemble the cross bar. Push the left and right bars fully into the cross brace until they hit the small indent in the middle.
   Fix into place using the 2 x screws supplied.
- 2. Attach the assembled cross bar and Clothesline wall brackets to the Ground Mount posts.
- 3. Before installation we suggest attaching the clothesline assembled side arms to the wall brackets. Please refer to Step 3 on the clothesline instruction sheet. <u>Don't attach the Clothesline front bar or line cord yet, this will be done later.</u>

Continue to the next page for assembly and installation of the Ground Mounting Plates









# **Ground Mounting Plates**

56 Northgate Drive, Thomastown VIC 3043 www.milkcan.com.au support@milkcan.com.au (03) 9464 6964

#### **Contents**

### **Choosing a Suitable Location**

**CG00** 

2 x Mounting Plates

Check that your chosen location has suitable side and front clearance.

8 x Concrete Bolts

Allow 50cm side clearance and 100cm front clearance.

6 x Self-drilling Screws

The Mounting Plate Kit is required when:

- Wall mounting of the clothesline is not possible and Ground Mount posts must be used.
- Ground Surface is concrete

### **Mounting Plate Installation** (Figure 1, 2 & 3)

- 7, 11 & 13 line Clothesline and Ground Mount Kit are 240cm wide.

If your available space is less than this, refer to Reducing the Overall Width.

- Position Mounting Plates to match the same centre spacing as your Clothesline and Ground Mount Kit.
- Mark concrete through the 4 x holes on base plate.Repeat step for the second Mounting Plate.
- 3. Using a hammer drill and 10mm masonry drill bit, drill all 8 x marked hole positions to a minimum depth of 80mm. Clean and prepare holes for installation.
- Place the Mounting Plates in position and affix with the concrete bolts provided. Repeat for the second Mounting Plate.
- 5. The Ground Mount posts will need to be cut down in height when they are installed into the Mounting Plates. The amount they are cut down depends on the users height, we recommend that the cross bar be at the user's height + 10cm.

Use the chart below to see how much the posts should be cut.

Users Height (cm)	Cut bottom of Ground Mount post by (cm)
150	60
155	55
160	50
165	45
170	40
175	35
180	30

Note if the ground is not level you will have to adjust the post heights accordingly i.e. one post will have to be longer or shorter than the other, depending on the slope of the ground

Insert the Ground Mount posts into the Mounting Plates you just installed and secure with the selfdrilling screws through the holes in the Mounting Plate posts.

## **Reducing the Overall Width**

If your available space doesn't allow the full width, you can reduce the width of your Clothesline and Ground Mount Kit as follows:

- 1. For the Clothesline, refer to the Clothesline instruction sheet.
- 2. For the Ground Mount Kit, refer to the Ground Mount Kit instruction sheet.

